

ECOPACK® LED

K

R_a

lm

W

lm/W

CG

Order no. OSRAM

Order no. Siteco

ECOPACK® LED 1200mm

LED	3000	CRI > 80	2000	18	110	ON/OFF	4052899396982	0LJ311715830
LED	4000	CRI > 80	2000	18	110	ON/OFF	4052899396968	0LJ311715840
LED	3000	CRI > 80	4000	36	110	ON/OFF	4052899396944	0LJ311730830
LED	4000	CRI > 80	4000	36	110	ON/OFF	4052899396920	0LJ311730840

ECOPACK® LED 1500mm

LED	3000	CRI > 80	2500	23	110	ON/OFF	4052899396906	0LJ311719830
LED	4000	CRI > 80	2500	23	110	ON/OFF	4052899396883	0LJ311719840
LED	3000	CRI > 80	5000	46	110	ON/OFF	4052899396869	0LJ311738830
LED	4000	CRI > 80	5000	46	110	ON/OFF	4052899396845	0LJ311738840

— Energy efficiency class of LED modules contained: A++, A+, A. LED modules are non-replaceable

Order number 801P007GB
LS Marketing 07.2017 | Technical modifications and errors subject to change.



OSRAM GmbH
Head office:

Marcel-Breuer-Strasse 6
80807 Munich, Germany
Phone +49 89 6213-0
Fax +49 89 6213-2020
www.osram.com

Siteco Beleuchtungstechnik GmbH
Head office:

Georg-Simon-Ohm-Strasse 50
83301 Traunreut, Germany
Phone +49 8669 33-0
Fax +49 8669 33-397
www.siteco.com



Our Brands

siteco **traxon** **e:cue**

OSRAM



Light is universal

ECOPACK[®] LED

The high-luminosity linear luminaire for general lighting. **Light is OSRAM**

OSRAM

ECOPACK® LED

Functional, universal and flexible

ECOPACK® LED is the high-luminosity linear luminaire for many standard applications.

On ceilings or walls.

For small or large rooms.


As a single solution or as a combination of several luminaires.

As a new installation or for replacing conventional lighting solutions.

Thanks to its universal design, the ECOPACK® LED blends easily into a wide variety of surroundings ranging from traffic zones in buildings, corridors and stairways to ancillary rooms of every type such as personnel, changing, storage and utility rooms. ECOPACK® LED brings together highly efficient functionality with a quality appearance thanks to an anodised aluminium housing with opal diffuser.



ECOPACK® LED generates pleasantly uniform light and achieves high visual comfort for many standard applications in buildings.

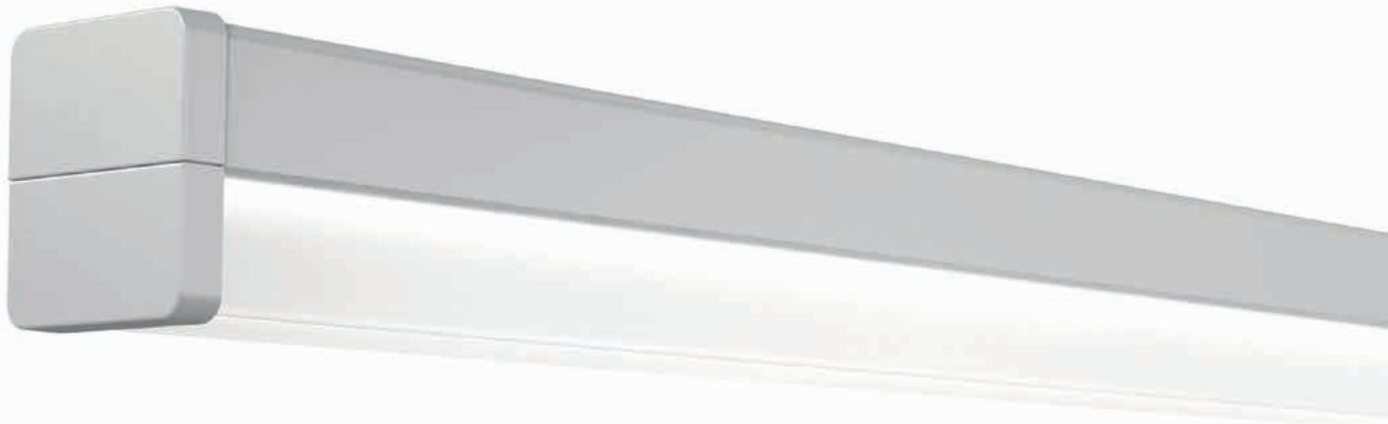

ECOPACK® LED

- Functional and universal general lighting for a wide variety of applications
- Flexibility thanks to two lengths, each with two lumen levels and two light colours
- Purist, integrative design for consistent installation appearances in buildings
- High quality of light with homogeneous distribution
- Designed for rapid installation and simple replacing of existing solutions
- Flexible mounting options: walls or ceilings, horizontal or vertical

The ECOPACK® LED range consists of two lengths (1200 mm and 1500 mm), each with two lumen levels between 2,000 and 5,000 lumens. The luminaire therefore features not only two brightness levels for each length but has highly flexible use thanks to a total of four luminous flux variants. This flexibility continues with mounting options – the ECOPACK® LED can be installed to both walls and ceilings, horizontally and vertically.

Simple mounting, simple handling

Installing the ECOPACK® LED is partly without tools – the photometric unit with diffuser is simply clipped onto the mounted aluminium housing. The plug connection for electrical connection is pre-assembled, thus saving both time and money when installing larger quantities.