

Light is OSRAM

SLIM PROFILE System

Slim Profile 6 mm height, 3 mm wings
FX-QMS-G1-TU15H6W3-300



Features & Benefits

Embed homogenous seamless lines of light into flat surfaces.
Thanks to the compact dimensions, this Slim Profile is ideal to embed the light into any surface with a minimal thickness of 6 mm.
Suitable for lighting up furniture, cabinets, shelves, plasterboards, to decorate or even provide additional general lighting.



Application

- Architectural Integration
- Shelves, Closets, Showcases, Cabinets Lighting
- Handrail and Stairs

Dimension & Available Covers





Slim Profile 3 mm wings FX-QMS-G1-TU15H6W3-300
Dimensions: W22x H6 x L3000 mm



Profile without cover



Slim cover frosted FX-QMS-G1-CFDB-300
Or
Slim cover clear FX-QMS-G1-CFTL-300
Dimensions: W11 x H4 x L3000 mm



Slim cover frosted



Recessed installation example with glue on wooden furniture



Slim Profile and strip LF1200 with and without frosted cover.

Electrical & Output data

Profile & LEDStrip Compatibility									
LED Strip White IP00				LF500	LF800S	LF1200	LF2000	LF3000	LF4000
Color Temperature				Luminous Flux (lm/m) ¹					
●	820	2000 K	White	-	-	950	1567	2375	-
●	822	2200 K	White	418	703	-	-	-	-
●	824	2400 K	White	-	-	1140	1900	2850	-
●	825	2500 K	White	456	760	-	-	-	-
●	827	2700 K	White	456	760	1140	1900	2850	3562
●	830	3000 K	White	494	760	1140	1900	2850	3562
●	835	3500 K	White	494	760	-	-	-	-
○	840	4000 K	White	494	760	1140	1900	2850	3657
○	850	5000 K	White	-	-	1140	1900	2850	3657
○	865	6500 K	White	494	760	1140	1900	2850	3657
●	CRI 90 922	2200 K	White	342	522	-	-	-	-
●	CRI 90 927	2700 K	White	380	589	1045	1710	2565	-
●	CRI 90 930	3000 K	White	380	589	1140	1900	2850	-
●	CRI 90 935	3500 K	White	418	646	-	-	-	-
○	CRI 90 940	4000 K	White	418	646	1140	1900	2850	-
○	CRI 90 965	6500 K	White	418	646	-	-	-	-

LED Strip Special White IP00				LF1200 SW	LF1200 TW	LF2000 SW	LF2000 TW	LF3000 SW
Color Temperature				Luminous Flux (lm/m) ¹				
●	CRI 90 930	3000 K	White	1140	-	1900	-	2850
○	CRI 90 940	4000 K	White	1140	-	1900	-	2850
●	TW	2700 - 6500 K	Dynamic White	-	1140	-	1900	-
●	TWW	2200/2500-6500 K	Dynamic White	-	-	-	-	-

LED Strip Color IP00				LF05A2	LF200C	LF05CE	LF05CA2	LF700RGBW	LF71300RGBW
Color Wave length				Luminous Flux (lm/m) ¹					
●	R	625	Red	114	-	-	-	-	-
●	G	525	Green	171	-	-	-	-	-
●	B	467	Blue	76	-	-	-	-	-
●	Y	587	Yellow	104	-	-	-	-	-
●	O	602	Orange	123	-	-	-	-	-
●	RGB	RGB	RGB	-	198	171	446	-	-
●	RGBW	RGBW	RGBW	-	-	-	-	662*	1228*


*Both channels RGB and White on

Profile & LED Strip Compatibility (combination possible only without cover)										
LED Strip White IP67				LFP500	LFP800S	LFP800	LFP1200	LFP1200 SW	LFP2000	LFP2000 SW
Color Temperature				Luminous Flux (lm/m) ¹						
●	824	2400 K	White	-	-	760	1045	-	1710	-
●	827	2700 K	White	418	703	760	1092	-	1805	-
●	830	3000 K	White	456	760	-	1140	-	1805	-
●	835	3500 K	White	456	760	-	-	-	-	-
○	840	4000 K	White	494	760	-	1140	-	1805	-
○	860	6000 K	White	-	-	-	1045	-	1710	-
○	865	6500 K	White	494	760	-	-	-	-	-
●	CRI 90 927	2700 K	White	342	522	-	-	-	-	-
●	CRI 90 930	3000 K	White	-	-	-	1045	-	1710	-
●	CRI 90 935	3500 K	White	380	589	-	-	-	-	-
○	CRI 90 940	4000 K	White	380	589	-	1140	1140	1805	1710
○	CRI 90 960	5800 K	White	-	-	-	1140	-	1805	-
○	CRI 90 965	6500 K	White	380	646	-	-	-	-	-

LED Strip Color IP67				LF05A-B3-P	LFP200C	LF05CE-P	LF05CA-P
Color Wave length				Luminous Flux (lm/m) ¹			
●	B	467	Blue	76	-	-	-
●	RGB	RGB	RGB	-	198	171	446

¹ Luminous flux comprehensive of the track's efficiency without cover (Light Output Ratio 95%).
 Note: -39% luminous flux with frosted cover and -10 % with clear cover (estimated value).

Thermal compatibility

IP00 LED strip	White & Special White					Tunable White		Color		
	LF500 LF800S	LF1200 LF1200SW	LF2000 LF2000SW	LF3000 LF3000SW	LF4000	LF1200 TW	LF2000 TW	LF05A2 LF05CA2 LF05CE LF200C	LF700 RGBW	LF1300 RGBW
Mounting condition	Maximum Ambient Temperature °C									
 Recessed mounting	50	50	35	25	25	50	35	50	50	35

IP67 LED strip	White & Special White			Color	
	LFP500 LFP800S	LFP800 LFP1200 LFP1200SW	LFP2000 LFP2000SW	LF05A-P LF05CE-P LFP200C	LF05CA-P
Mounting condition	Maximum Ambient Temperature °C				
 Recessed mounting	50	50	35	50	35


The tables report the maximum recommended ambient temperature for the Slim Profile 3 mm wings height in combination with IP00 and IP67 LED strips in case of recessed mounting condition. In these conditions the expected Tc of LED strip is the maximum allowed.

Note: the table is for application evaluation only; always ensure that Tc do not exceed the maximum allowed value. For further information contact our support service at flex-support@osram.com

Visibility of LED spots


IP00 LED strip	White & Special White				Tunable White		Color	
	LF500	LF800S	LF1200 LF2000 LF3000	LF1200SW LF2000SW	LF1200TW LF2000TW	LF05A2 LF05CA2 LF200C	LF700RGBW	LF1300RGBW
Covers	Maximum Ambient Temperature °C							
Frosted cover FX-QMS-G1-CFDB-300								
Clear Cover FX-QMS-G1-CFTL-300								

LINEARlight FLEX® LED strips in system combination with profiles and covers – Visibility of LED spots.




Front view from observing point: < 1.5m, size: not to scale

Technical drawings




Slim Profile 6 mm height, 3 mm wings
FX-QMS-G1-TU15H6W3-300
Order code 4052899448889

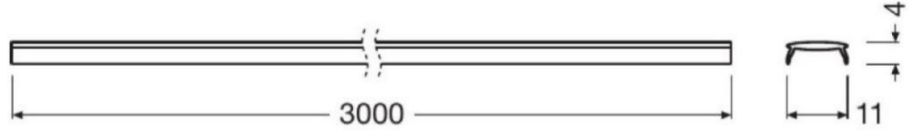

Slim cover frosted
FX-QMS-G1-CFDB-300
Order code 4052899446991

Slim cover clear
FX-QMS-G1-CFTL-300
Order code 405289999749



Plastic End cap
FX-QMS-G1-EFGP-TU15H6W3
Order code 4052899449138

Plastic end cap with hole
FX-QMS-G1-EFGH-TU15H6W3
Order code 405289999947

Order Code

Product Code	Description	Product Number (EAN10)	Dimensions (length x width x height)	EAN Package content
FX-QMS-G1-TU15H6W3-300	Slim Profile 3 mm wings	4052899448889	3000 x 15.2 x 6 mm	1x Profile
FX-QMS-G1-CFTL-300	Slim cover clear	4052899999749	3000 x 11 x 4 mm	1x Cover
FX-QMS-G1-CFDB-300	Slim cover frosted	4052899446991	3000 x 11 x 4 mm	1x Cover
FX-QMS-G1-EFGP-TU15H6W3	End cap	4052899449138	22 x 19 x 6 mm	40x End cap
FX-QMS-G1-EFGH-TU15H6W3	End cap with hole	405289999947	22 x 19 x 6 mm	40x End cap

Complete System Example



For further information please write to flex-support@osram.com
or consult our Flex Configurator at www.osram.com/flex-configurator

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

OSRAM GmbH

Head Office:

Marcel-Breuer-Strasse 6
80807 Munich, Germany
Phone +49 89 6213-0
Fax +49 89 6213-2020
www.osram.com

OSRAM