

Light is OSRAM



## OTi DALI 160/220-240/24 1CH


24 V Single-channel Constant Voltage LED driver  
Dimmable range 0/0,1% - 100%

### Benefits

- Long lasting and high reliability.
- DALI-2 single channel.
- High efficiency in slim form factor
- Patent pending flicker-free dimming until 0,1%.

### Applications

Hospitality, cove lighting, shops.  
Suitable for indoor CLASS I and CLASS II luminaires.

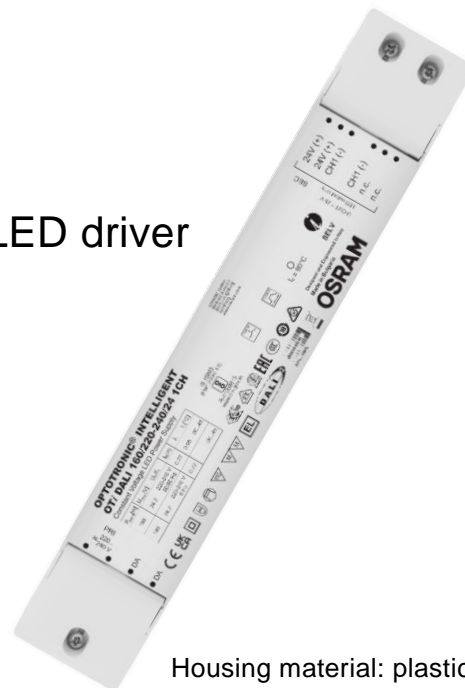


Housing material: plastic, white  
\* image for information purpose only

### Approvals



L	300 mm	Total length
B	50 mm	Width
H	35 mm	Height

When not printed on product label, they are under evaluation.



## Product Features

- DALI-2 certified
- Single channel
- Lamp Failure detection
- CLASS II independent housing
- Smart Power Supply
- SELV, Vout: 24,2 V
- t<sub>a</sub> range -20...+45°C
- Overload/Over temperature and Short circuit protection
- Dimmable via DALI interface
- Very low min dimming level: 0,1%
- Mains voltage: 220–240 V<sub>ac</sub> / 176–276 V<sub>dc</sub>
- 50'000 h lifetime at max t<sub>c</sub>\*
- 5 years guarantee\*
- IP20 independent housing
- Output wire length up to 50 m
- Touch DIM compatibility
- Emergency lighting compatibility

\*10% cumulated failure, 24 h = 14 h ON, 10 h Standby

## Electrical specification

	Item	Value	Unit	Remarks
INPUT	Nominal line voltage	220 – 240	V	
	Mains line frequency	0 / 50 / 60	Hz	
	AC voltage range	198 – 264	V	Max 350 V for 2 h. Auto switch off >280 V <sub>ac</sub>
	DC voltage range	176 – 276	V	
	Nominal current	0.77	A	Typical @ Full load, 230 Vac, 50 Hz
	Total Harmonic Distortion (THD)	< 5	%	Full load, 230 V <sub>ac</sub> , 50 Hz, see graphs
	Power factor λ	0,99		Full load, 230 V <sub>ac</sub> , 50 Hz, see graphs
	Efficiency in full load	93	%	Typical, steady state @ full load, 230 V <sub>ac</sub> , 50 Hz, see graphs
	Device power loss	11	W	Full load, 230 Vac, 50 Hz, Typical
	Networked stand-by power	<0,50	W	230 V <sub>ac</sub> , 50 Hz. Typical 350 mW
	Protection class	II		
	Suitable for fixtures with prot. Class	I / II		
	Inrush current	57	A <sub>pk</sub>	Full Load, 230 V <sub>ac</sub> , Cold Start Duration = 280 μs 50% / 50% I <sub>pk</sub>
	Max. units per circuit breaker:			
	Max. ECG no. on circuit breaker 10 A (B)	4		B-Type is underusing thermal protection
	Max. ECG no. on circuit breaker 16 A (B)	7		
	Max. ECG no. on circuit breaker 25 A (B)	12		
	Max. ECG no. on circuit breaker 10 A (C)	8		C-Type is the preferable MCB choice
Max. ECG no. on circuit breaker 16 A (C)	13			
Max. ECG no. on circuit breaker 25 A (C)	20			
Max. ECG no. on circuit breaker 10 A (D)	9		D-Type is underusing short-circuit protection	
Max. ECG no. on circuit breaker 16 A (D)	14			
OUTPUT	Nominal voltage	24,2	V	
	Voltage accuracy	± 3	%	
	Voltage ripple	< 1	V <sub>pp</sub>	@ 100 Hz, full load. Typical < 500 mV <sub>pp</sub>
	Nominal output power	0 - 160	W	Power factor, harmonics and EMI guaranteed between 60 – 160 W
	Max output power in AC (at steady state)	160	W	Smart Power to manage up to P <sub>out_max</sub> + 25%
	Max output power in DC (at steady state)	140	W	
	DC Output power (EL)	15	%	Pre-set value, adjustable via Tuner4Tronic
Galvanic isolation	SELV			
DIMMING	Dimming interface	DALI 2.0		Proper DALI diagnostics with a min. load of 9% (15 W) and dimming > 3%
	Dimming range	0,1 – 100	%	Dali dimming steps (0 – 254)
	Dimming method	PWM		
	TLA (Flicker and strobe effects)	P <sub>ST</sub> < 1 SVM < 0,4	-	For every dimming condition (n.a. < 1%) Extended SVM metrics (10 kHz).
	Galvanic Isolation	Basic / Double		Basic DALI to Primary / Double DALI to Secondary
ENVIRONMENTAL	Ambient temperature range	-20...+45	°C	
	Max. temperature at T <sub>c</sub> test point	90	°C	Measured on t <sub>c</sub> point indicated of the prod label, t <sub>a</sub> not exceeded
	Max. case temperature in fault condition	115	°C	
	Storage temperature range	-25...+85	°C	
	Permitted rel. humidity during operation	5 – 85	%	Not condensing
	Surge capability (L vs N)	1	kV	L/N acc to. EN 61547
	Environmental rating	Indoor		
	IP protection class	IP 20		
	Mains switching cycles	> 200000	cycles	@ t <sub>a</sub> = 25°C
	Expected ECG lifetime	50000	h	@ t <sub>c</sub> 90°C – 0,2% / 1000 h failure rate
	50000	h	@ t <sub>c</sub> 85°C – 0,1% / 1000 h failure rate	

	Item	Value	Unit	Remarks
	No-load proof	Yes		Auto recovery
	Intended for no-load operation	No		
	Overheating protection	Yes		Auto recovery
	Overload protection	Yes		Auto recovery + Smart Power
	Short-circuit protection	Yes		Auto recovery
<b>DIMENSIONS</b>	Height	35	mm	
	Length	300	mm	Overall including fixing brackets
	Width	50	mm	
	Weight	380	g	
	Mounting holes interaxis	258	mm	
	Casing material	Plastic		White
	Type of connection	Screw terminals		0,5 – 2,5 mm <sup>2</sup>
	Wire preparation length	6	mm	Input and output terminals

## Protection

Over temperature, Overload, Short-circuit, Input overvoltage, Output overvoltage. Reversible.



- Input wires cross section: 0,5 – 2,5 mm<sup>2</sup>
- Output wires cross section 0,5 – 2,5 mm<sup>2</sup>
- Wire peeling length: input 6 mm, output 6 mm

## LED wire length


The wire length from the ECG to the LED module can reach 50 m with verified EMI.

Below matrix shows the maximum LED load power according to cable length and section, at 25°C.

The proper wire section will ensure that the LED module input voltage is at least 23 V.


V <sub>out</sub> 24,2V / nominal 160 W	AWG	mm <sup>2</sup>	Cable length [m]					
			5	10	20	30	40	50
Cable section	17	1	156	78	39	26	19	16
	16	1.5	160	116	58	39	29	23
	14	2.5	160	160	96	64	48	39
	12	4	160	160	154	103	77	62
	10	6	160	160	160	155	116	93
	8	10	160	160	160	160	160	154

Values are indicative. Each connection may increase total voltage drop.

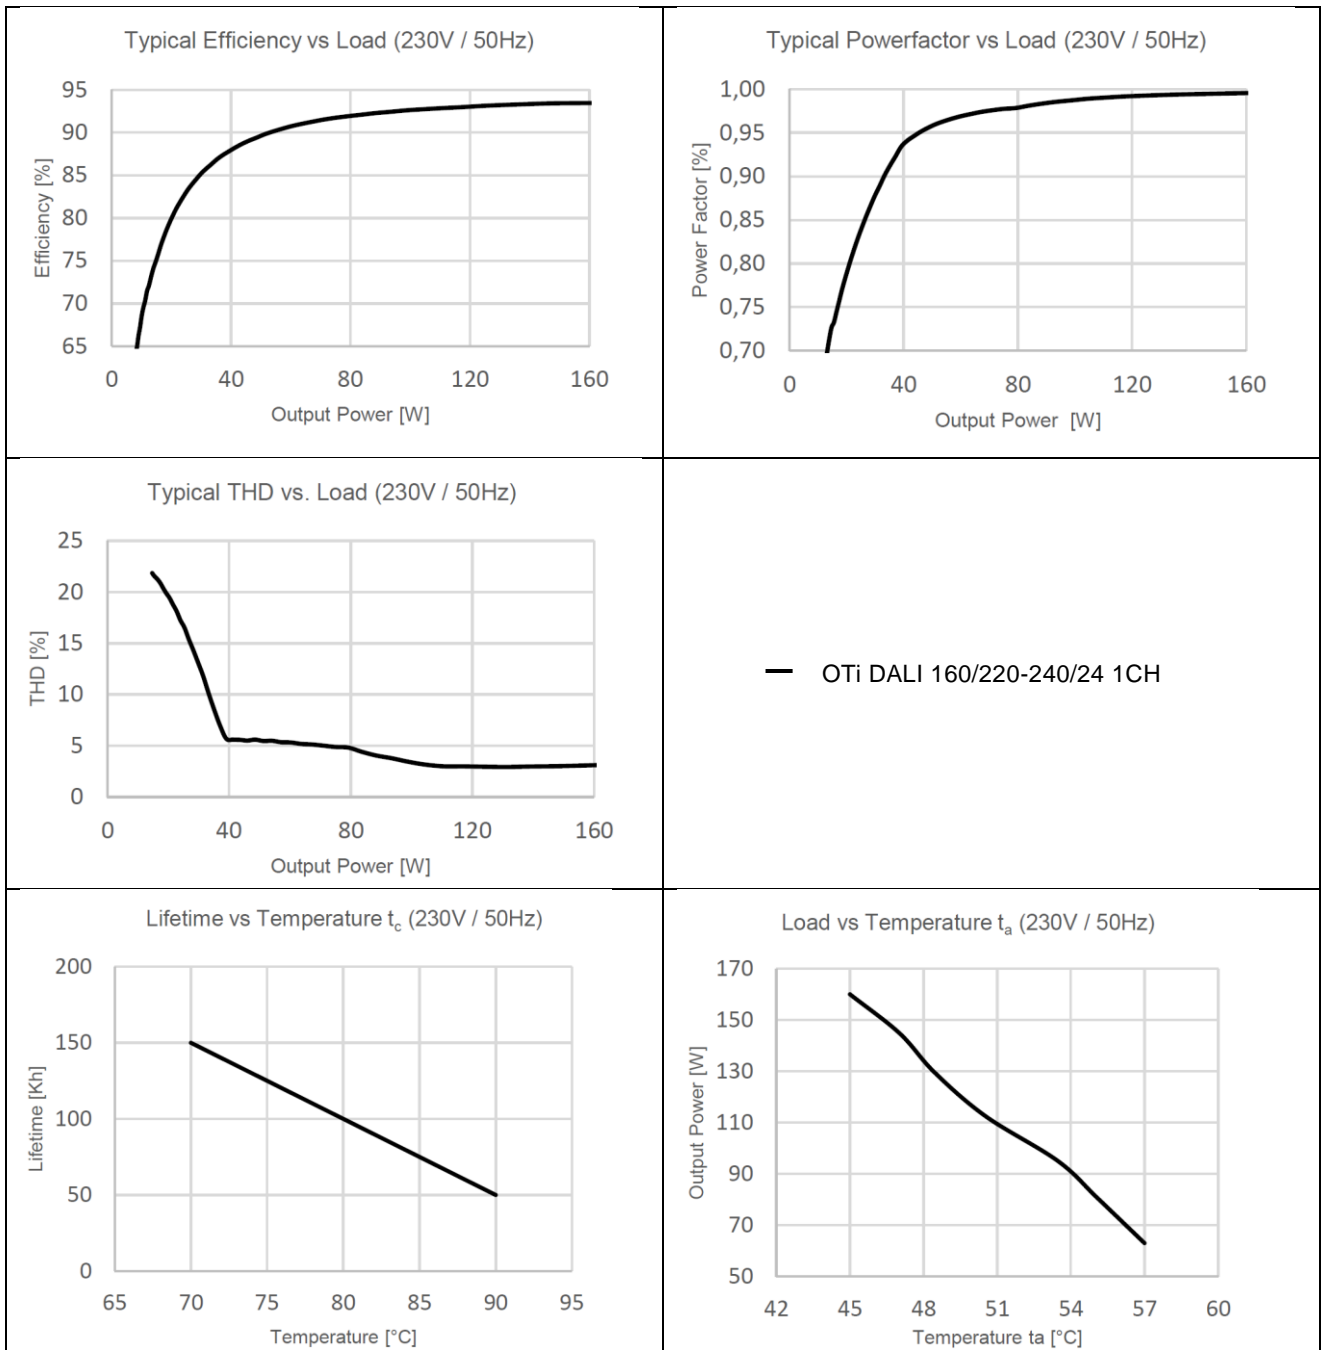

## Touch DIM

This driver supports Touch DIM operation, which enables an easy control of light by means of a push-button and additional Presence Sensors and/or Light Sensor directly connected to the DALI terminals. No further programming is necessary, unless additional functions are to be implemented, like Corridor Function, fading time, dimming limit levels and so on. For these additional features, the Tuner for Tronic (T4T) is suggested as a convenient tool. For more information, please refer to OSRAM on-line documentation and catalogue.

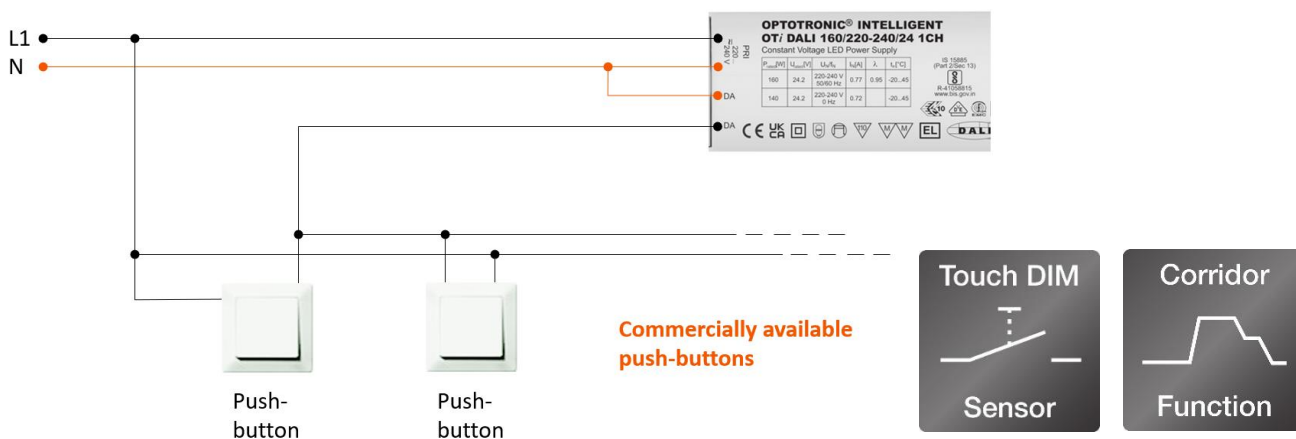

### ADDITIONAL INFORMATION

- The Touch DIM input voltage ranges from 10 Vac to 264 Vac and has single insulation from mains.
- DALI and Touch DIM must never be used at the same time: control is achieved either with DALI controller or with the Touch DIM function (self-recognized and kept at the first press following 5 s without DALI frames after last turn-on).
- Up to 20 ECGs can be controlled via direct push-button use. The number of push-buttons is limited by the sum of the overall cable length between switch(es) and the connected ECGs: max length should not exceed 25 m. In case of longer distances, a small 12 V transformer (AC buttons only) or a DALI repeater must be used to overcome line capacitance.

### Touch DIM operation

The following item-list briefly describes the use of push-button for brightness control:

- Switching the lamp on/off: Short Press (< 0,5 s).
- Dimming: Long Press (> 0,5 s); the dimming direction is changed with each press.
- Store reference value: double-click (press twice within 0,4 s) while lamp is *On* → Switch to *Mode 2*.
- Delete reference value: double-click while lamp status is *Off* → Switch to *Mode 1*.
- Long Press while lamp status off: the lamp is switched on at the minimum dimmer setting and faded up until the push-button is released.

### Operating Modes

- Mode 1: the switch-on value is always the last brightness/color before the lighting was switched off
- Mode 2: the switch-on value is the value stored by double clicking (default mode)

### Re-synchronization

In case of many ECGs connected to the same Touch DIM buttons, there is a chance that an ECG will operate out of synchronism with the others (different on/off state or dimming level).

To have all of them back in synchronism, just apply a Long – Short – Long sequence, and in case apply a double-click afterwards to store a new common reference level.

## Remarks

- **Product performances below minimal load condition:** the output power is still generated if the load is below the minimum output power of 60 W, without any safety risk, but performances regarding THD, EMI, etc. are not guaranteed. See typical operation window graph for details.
- **Output terminals:** The negative terminals are tied together, as well as the two positive ones are.
- **Output short circuit protection:** short circuit current is limited without damaging the unit. The short circuit protection is self-restoring.
- **Output overload protection:** in case of overload (< 125%), the device automatically dims down the output to keep the power within 160 W and let the LED load warm-up. When the overload exceeds the 125% of maximum nominal output power, the LED load will blink to manifest a fault condition, till the short circuit limit (> 200%).
- **Input over voltage protection:** driver is capable of having input of max 350 V for 2 hours. To prevent damages to the unit, driver performs auto switch off when input voltage is >280 V<sub>ac</sub>, therefore driver operation in this abnormal condition is not guaranteed. The over voltage protection is self-restoring.
- **Lamp failure detection:** minimum load that doesn't trigger open circuit detection is 15 W.
- **No load operation:** do not put a switch between ECG and load.
- Intended for use with LED modules.
- The forward voltage of the LED light source shall be within the defined operating window of the control gear in all operating conditions including dimming if applicable
- **Over temperature protection:** the driver is protected against temporary overheating, so it automatically dims down when  $t_c$  is exceeded, and eventually turns off. The protection is self-restoring.
- **Emergency lighting:** this LED power supply is suitable for emergency lighting fixtures acc. to EN 60598-2-22, with emergency output factor EOFI = 0,24 for OTi DALI 50 and EOFI = 0,15 for OTi DALI 80 (default values, programmable up to EOFI = 1 with  $P_{max}$  12 W) and related duration time of 10 h at least. Function in emergency is ensured up to  $t_a = 80^\circ\text{C}$  and  $t_c = 96^\circ\text{C}$ .
- **Ecodesign regulation information:**  
Intended for use with LED modules. The forward voltage of the LED light source shall be within the defined operating window of the control gear in all operating conditions including dimming if applicable. Separate control gear and light sources must be disposed of at certified disposal companies in accordance with Directive 2012/19/EU (WEEE) in the EU and with Waste Electrical and Electronic Equipment (WEEE) Regulations 2013 in the UK. For this purpose, collection points for recycling centres and take-back systems (CRSO) are available from retailers or private disposal companies, which accept separate control gear and light sources free of charge. In this way, raw materials are conserved and materials are recycled.

**Standards****Ordering information**

EN 61347-1  
EN 61347-2-13  
EN 61547  
EN 61000-3-2  
EN 60598-2/22  
EN 62384  
EN 62386

Product name	EAN 10	EAN 40	Pieces / Box
OTi DALI 160/220-240/24 1CH	4062172178006	4062172178013	20

OSRAM GmbH

Head Office:

Marcel-Breuer-Strasse 6  
80807 Munich, Germany  
Phone +49 89 6213-0  
[www.osram.com](http://www.osram.com)

The OSRAM logo is displayed in a bold, orange, sans-serif font.