

Edition: 05/06 - subject to change

Supersedes: 08/98

Status: valid


**64716 (230/240V)**

## ■ Product description

The OSRAM 64716 is mainly used for studio and theatre lighting. The lamp has a compact filament and is optimum for ellipsoidal spot luminaires.

## ■ Technical Data

Lamp / order reference		64716
ANSI		GKV
LIF		-
Rated lamp wattage	W	600
Rated lamp voltage	V	230/240
Average life-time	h	250
Color temperature	K	3200
Luminous flux	lm	14000
Luminous efficacy	lm/W	22.4
Base		G 9.5
Diameter d	mm	19 max.
Lamp length L	mm	101 max.
LCL a	mm	60.5
Filament dimensions (w x h)	mm	9 x 13
Type of filament		biplan

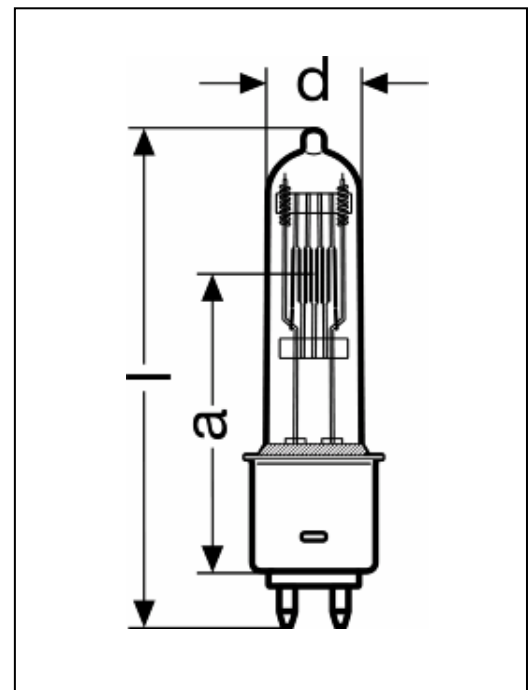

## ■ Lamp operation

Max. pinch seal temperature	°C	350
Cooling		convection
Burning position		s180
Fuse protection		6,3A quick