

Edition: 05/06 - subject to change

Supersedes: /
Status: valid


64719 (230/240V)

■ Product description

The OSRAM 64719 is mainly used for stage and theatre and fitted into Fresnel, Profile and PC Spot luminaires.

■ Technical Data

Lamp / order reference		64719
ANSI		-
LIF		T/12
Rated lamp wattage	W	650
Rated lamp voltage	V	230/240
Average life-time	h	750
Color temperature	K	3000
Luminous flux	lm	12000
Luminous efficacy	lm/W	18.5
Base		GX 9.5
Diameter d	mm	26 max.
Lamp length L	mm	110 max.
LCL a	mm	55 ± 2
Filament dimensions (w x h)	mm	13 x 11
Type of filament		biplan

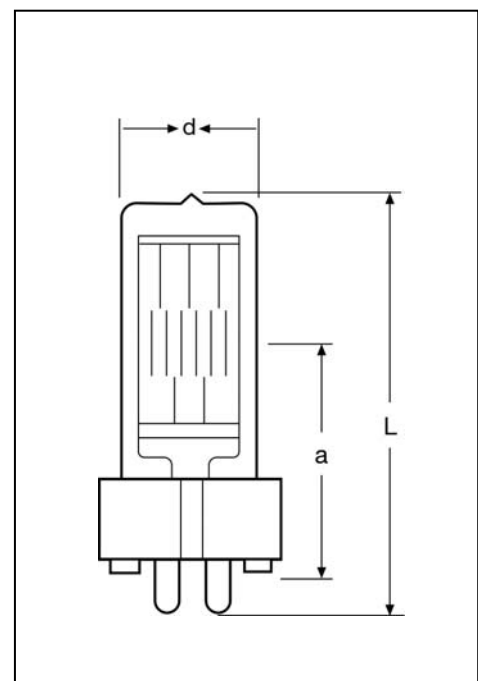

■ Lamp operation

Max. pinch seal temperature	°C	350°C max.
Burning position		s90
Fuse protection		4A quick