


# LINEARlight Flex - LF05E

## Data Sheet

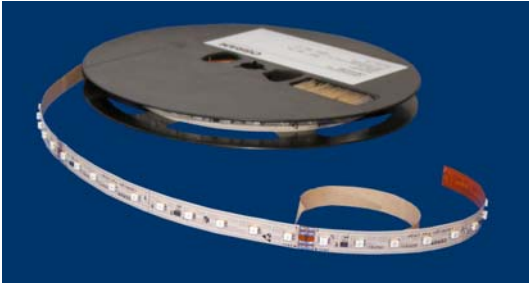

### Benefits

- Linear separable LED strip on flexible printed circuit board with self-adhesive back
- Low profile
- Available in various colors

### Applications

- Edge-coupling of transparent or diffuse materials
- Path illumination, contour accentuation
- Signage and illuminated advertising
- Walkways

### Technical Operating Data

Product	Color	Number of LEDs	Voltage [V DC]*	Power [W]*	Current [A]*	Radiance Angle [°]*	Wavelength [nm] Color Temp [K]*	Lum. Flux [lm]*
LF05E-W2F-854	white	200	24	24,5	1	120	5400 K	940
LF05E-W2F-840	white	200	24	24,5	1	120	4000 K	940
LF05E-W2F-830	white	200	24	24,5	1	120	3000 K	735
LF05E-W2F-827	white	200	24	24,5	1	120	2700 K	735
LF05E-R1	red	200	24	36,0	1,5	120	625 nm	840
LF05E-Y1	yellow	200	24	36,0	1,5	120	587 nm	840
LF05E-T2	green	200	24	24,5	1	120	525 nm	940
LF05E-B2	blue	200	24	24,5	1	120	470 nm	290

\*) All Data are related to the entire module

Due to the special conditions of the manufacturing processes of LED the typical data of technical parameters can only reflect statistical figures and do not necessarily correspond to the actual parameters of each single product which could differ from the typical data.

+) Preliminary Data

\*\*) Discontinued

### Technical Features


- One reel (entire module 200 LEDs) comes with one LED-band
- Light emission vertical to the mounting surface
- Size of printed circuit board (L x W x H): 6000 mm x 8 mm x 3mm
- Size of smallest unit (L x W): 150 mm x 8 mm
- Additional cutting possibilities by using the termination LF-2TERM
- Easy mounting by adhesive tape on isolated backside
- Easy connection with optional CONNECTsystem LF-xx Flex: Feeder LF-2PIN Flex, connector LF-CONN-10 Flex and LF-CONN-150 Flex.
- Dimmable by pulse width modulation (PWM)
- Only parallel connection allowed
- Up to 50,000 h lifetime

## Minimum and Maximum Ratings

Product	Operating Temperature at Tc-Point [ °C ] *	Storage Temperature [ °C ] *	Voltage Range [ V dc ] *	Reverse Voltage [ V dc ] *
LF05E-W2F-854	-30 ... 75	-40 ... 85	23 ... 25	25
LF05E-W2F-840	-30 ... 75	-40 ... 85	23 ... 25	25
LF05E-W2F-830	-30 ... 75	-40 ... 85	23 ... 25	25
LF05E-W2F-827	-30 ... 75	-40 ... 85	23 ... 25	25
LF05E-R1	-30 ... 75	-40 ... 85	23 ... 25	25
LF05E-Y1	-30 ... 75	-40 ... 85	23 ... 25	25
LF05E-T2	-30 ... 75	-40 ... 85	23 ... 25	25
LF05E-B2	-30 ... 75	-40 ... 85	23 ... 25	25

\*) Exceeding maximum ratings for operating and storage temperature will reduce expected life time or destroy the LED Module.  
Exceeding maximum ratings for operating voltage will cause hazardous overload and will likely destroy the LED Module.  
The temperature of the LED module must be measured at the Tc-point according to EN60598-1 in a thermally constant status with a temperature sensor or a temperature sensitive label. For exact location of the Tc-point see drawing below.

## Drawings

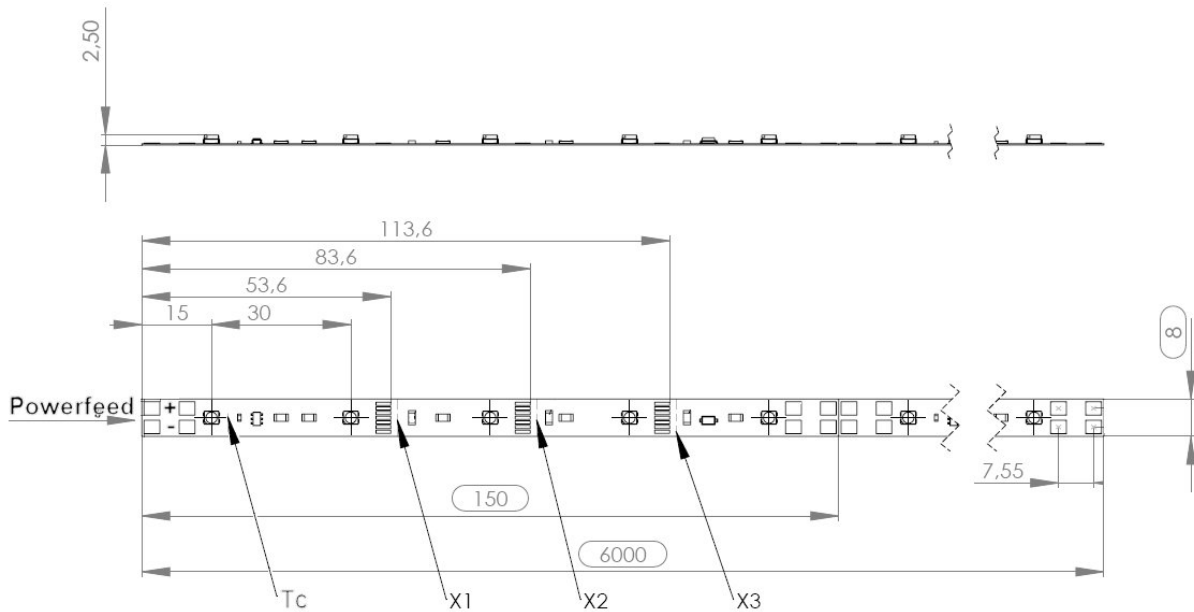

X1, X2, X3:

Additional cutting options; LF-2TERM termination needed

Zusätzliche Schneidemöglichkeiten; Abschlußstecker LF-2TERM benötigt

All values in mm /

Alle Werte sind in mm angegeben

## Safety Information

- The LED module itself and all its components must not be mechanically stressed.
- Assembly must not damage or destroy conducting paths on the circuit board.

**In order to drive OSRAM LED-Modules safely, it is absolutely necessary to operate them with an electronically stabilised power supply protecting against short circuits, overload and overheating.**

To also ease the luminaire/installation approval, electronic control gear for LED or LED modules should carry the CE mark and be ENEC certified. In Europe the declarations of conformity must include the following standards:  
CE: EC 61347-2-13, EN 55015, IEC 61547 and IEC 61000-3-2 - ENEC: 61347-2-13 and IEC/EN 62384.  
Also check for the mark of an independent authorized certification institute.  
Please see the relevant brochure for more detailed information (see "Related and Further Information")

**OSRAM OPTOTRONIC® electronic control gear complies to all relevant standards and guarantees safe operation.**

- Installation of LED modules (with power supplies) needs to be made with regard to all applicable electrical and safety standards. Only qualified personnel should be allowed to perform installations.
- Observe correct polarity!  
Depending on the product incorrect polarity will lead to emission of red or no light. The module can be destroyed! Correct polarity immediately! (see "reverse voltage", page 2)
- Parallel connection is highly recommended as safe electrical operation mode.  
Serial connection is not recommended. Unbalanced voltage drop can cause hazardous overload and damage the LED module.
- Please ensure that the power supply is of adequate power to operate the total load.
- When mounting on metallic or otherwise conductive surfaces, there needs to be a electrical isolation at soldering points between module and the mounting surface.
- The maximum length of a coherently operable unit is 6m.
- Pay attention to standard ESD precautions when installing the module.
- If the module is supposed to be cut at X1, X2 or X3 (see techn. drawing) the following has to be respected:
  - Take care for the correct orientation of the modul: The power feed must come from the side indicated in the techn drawing.
  - The module must not be cut before the first two LED, which have the Tc-Point in between them. This part would emit no light.
  - To operate the desired subunits, the termination LF-2TERM must be applied. In analogy to LF-2PIN, push the termination over the open contacts and and fix it.
- The module, as manufactured, has no conformal coating and therefore offers no inherent protection against corrosion. The ability to customize the length of the module by cutting at specifically marked points is a key feature of the product and hence the reason for no factory installed conformal coating. For these reasons, it is recommended that the user complete all module modifications first (cutting, wiring) and then apply a conformal coating in the final stages of installation.
- Damage by corrosion will not be honored as a materials defect claim. It is the user's responsibility to provide suitable protection against corrosive agents such as moisture and condensation and other harmful elements.
- For applications involving exposure to humidity and dust the module must be protected by a fixture or housing with a suitable protection class. The module can be protected against condensation water by treatment with an appropriate circuit board grade conformal coating. The conformal coating should have the following features:
  - Optical transparency
  - UV-resistance
  - thermal expansion matching the thermal expansion of the module  $15-30 \cdot 10^{-6} \text{ cm/cm/K}$
  - low permeability of steam for all climatic conditions
  - resistance against corrosive environment

## Assembly Information

- Connection with soldering wires on unmounted module: Do not pre-tin the solderpads but pre-tin the wires and solder for max 4 s at 300 °C. Allow solderpoints to completely cool down before the next soldering. Prevent shear- or peel forces.
- Soldering of wires with the module mounted on a heatsink: Pre-tin solderpads and wires and solder for max 3 s at 350 °C. Allow solderpoints to completely cool down before the next soldering. Prevent shear- or peel forces.
- The smallest unit (150 mm- 5 LEDs) can be removed by cutting with scissors between the designated solder pads.
- The mounting of the module is facilitated by means of the double-sided adhesive on the back-surface of the module. Care must be taken to provide a clean and dry mounting surface, free of oils or silicone coatings as well as dirt particle. The mounting substrate must have sufficient structural integrity. Take care to completely remove the protective backing. Once the module is appropriately positioned, press on the module with about 20N/cm<sup>2</sup> (refer to application techniques of 3M adhesive transfer tapes). In difficult cases the use of a primer may help.
- The minimum bending radius is 2 cm.
- The thermal length expansion coefficient of the modul is  $17 \cdot 10^{-6} \text{cm/cm/K}$ . When installing in environments with large variations in temperature (e.g. outdoor applications) and operating length of more than 2 m, the use of metallic mounting surfaces is necessary. Otherwise it is advisable to use an additional thicker adhesive tape to absorb the stress of any mismatch in expansion coefficients.

## Ordering Guide

Productgroup	Productname	EAN *	S-Unit *
LINEARlight Flex	LF05E-W2F-854	4008321965943	8
LINEARlight Flex	LF05E-W2F-840	4008321955395	8
LINEARlight Flex	LF05E-W2F-830	4008321955401	8
LINEARlight Flex	LF05E-W2F-827	4008321546722	8
LINEARlight Flex	LF05E-R1	4008321955418	8
LINEARlight Flex	LF05E-Y1	4008321955432	8
LINEARlight Flex	LF05E-T2	4008321955449	8
LINEARlight Flex	LF05E-B2	4008321955425	8

\*) EAN: Ordering number per single module  
S-Unit: Modules per shipping unit

Note: Typical performance data are subject to change without any further notice, particularly as LED technology evolves.

## Sales and Technical Support

### OSRAM GmbH

Hellabrunner Strasse 1  
D - 81536 München  
Germany  
[www.osram.com](http://www.osram.com)  
+49 (0)89 6213-0

Sales and technical support is given by the local OSRAM subsidiaries.  
On our world wide homepage all OSRAM subsidiaries are listed with complete address and phone numbers.

## Related and Further Information

- A new approach to light [153 S006 GB](http://www.osram.com/led-systems-downloads)  
[www.osram.com/led-systems-downloads](http://www.osram.com/led-systems-downloads)
- New creativity in lighting design [138 W002 GB](http://www.osram.com/led-systems-downloads)  
LED Modules for illuminated signs
- OPTOTRONIC® Technical Guide [130 T008 GB](http://www.osram.com/ecg-downloads) [www.osram.com/ecg-downloads](http://www.osram.com/ecg-downloads)
- OPTOTRONIC® Data Sheets <http://catalog.myosram.com>
- OSRAM LED systems [www.osram.com/led-systems](http://www.osram.com/led-systems)
- New standards for LED control gear [130 W011 GB](http://www.osram.com/ecg-download)  
[www.osram.com/ecg-download](http://www.osram.com/ecg-download)