



LEDiving® replacement lamps – Overview of exterior front applications



LEDiving® PREMIUM SL – Exterior front lighting<sup>1)</sup>

1	2	3	4	5	6
Low beam / High beam	Daytime running light	Fog light	Front indicator	Parking/ marker light / Position light	Side indicator
≅ H4, H7, H11, HB4	≅ H7, H8/H11/H16, PS13W, PS19W, P21W, P21/5W, P27/7W, W16W, W21W, W21/5W	≅ H8/H11/H16, H10	≅ P21W, P21/5W, PY21W, P27/7W, W21W	≅ H8/H11/H16, P21/5W, P27/7W, T4W, W5W, W21W, W21/5W	≅ P21W, WY5W
P43t	PX26d	PGJ19-1/2/3	BA15s	PGJ19-1/2/3	BA15s
PX26d	PGJ19-1/2/3	PY20d	BAY15d	BAY15d	W2.1x9.5d
PGJ19-2	PG18.5d-1		BAU15s	W2.5x16q	
P22d	PG20-1		W2.5x16q	BA9s	
	BA15s		W3x16d	W2.1x9.5d	
	BAY15d			W3x16d	
	W2.5x16q			W3x16q	
	W2.1x9.5d				
	W3x16d				
	W3x16q				



LED Color	Use behind red glass	Use behind clear glass	Use behind amber glass
<b>Red</b> (Tail light, Brake light)	Yes	Not recommended	Not recommended
<b>White</b> (Daytime running light, Reversing light, License plate light, Parking light)	Not recommended	Yes	Not recommended
<b>Amber</b> (Indicator light, Side marker light)	Not recommended	Yes	Yes

LEDDriving® replacement lamps – Overview of exterior front applications



LEDDriving® SL – Exterior front lighting<sup>1)</sup>

1	2	3	4	5	6
Low beam / High beam	Daytime running light	Fog light	Front indicator	Parking/ marker light / Position light	Side indicator
-	≅ PS13W, PS19W, P21W, P21/5W, P27/7W, W16W, W21W, W21/5W	-	≅ P21W, P21/5W, PY21W, P27/7W, W21W	≅ P21/5W, P27/7W, W5W, W21W, W21/5W	≅ P21W, W5W
-	PG18.5d-1	-	BA15s	BAY15d	BA15s
-	PG20-1	-	BAY15d	W2.5x16q	W2.1x9.5d
-	BA15s	-	BAU15s	W2.1x9.5d	-
-	BAY15d	-	W2.5x16q	W3x16d	-
-	W2.5x16q	-	W3x16d	W3x16q	-
-	W2.1x9.5d	-	-	-	-
-	W3x16d	-	-	-	-
-	W3x16q	-	-	-	-
Canbus Control Unit 50 W <sup>2)</sup>		Canbus Control Unit 21 W <sup>2)</sup>		Canbus Control Unit 5 W <sup>2)</sup>	

Available color options:

LEDDriving® PREMIUM SL	LEDDriving® SL
<span style="display: inline-block; width: 10px; height: 10px; background-color: white; border: 1px solid black; margin-right: 5px;"></span> Cool White <span style="display: inline-block; width: 10px; height: 10px; background-color: red; border: 1px solid black; margin-left: 20px; margin-right: 5px;"></span> Red	<span style="display: inline-block; width: 10px; height: 10px; background-color: white; border: 1px solid black; margin-right: 5px;"></span> Cool White <span style="display: inline-block; width: 10px; height: 10px; background-color: red; border: 1px solid black; margin-left: 20px; margin-right: 5px;"></span> Red
<span style="display: inline-block; width: 10px; height: 10px; background-color: yellow; border: 1px solid black; margin-right: 5px;"></span> Amber	<span style="display: inline-block; width: 10px; height: 10px; background-color: yellow; border: 1px solid black; margin-right: 5px;"></span> Amber

1) These products do not have ECE approval. This means they must not be used on public roads in any exterior application. Use on public roads leads to cancellation of operating license and loss of insurance coverage. Several countries do not allow sale and use of these products. Please contact your local distributor for information on the availability in your country.  
 2) LEDDriving® CANBUS CONTROL UNITS avoid error messages on the board computer when using LED retrofits within 5W, 21W and 50 W applications.

LEDiving® replacement lamps – Overview of exterior rear applications



LEDiving® PREMIUM SL – Exterior rear lighting<sup>1)</sup>

1	2	3	4	5	6	7
Rear indicator	License plate light	Brake light, Third braking light	Rear fog light	Tail light	Reversing light	Additional brake light
≅ P21W, PY21W, P27/7W, W21W	≅ C5W, P21W, P21/5W, W5W	≅ P21W, P21/5W, P27W, P27/7W, W5W, W16W, W21W, W21/5W	≅ P21W, P21/5W, P27/7W, W16W, W21W	≅ P21W, P21/5W, P27/7W, W5W, W16W, W21W, W21/5W	≅ P21W, P27/7W, W16W, W21W	≅ P21W, P27/7W, W5W, W16W, W21W
BA15s	SV8.5-8 (31, 36, 41mm)	BA15s	BA15s	BA15s	BA15s	BA15s
BAU15s	BA15s	BAY15d	BAY15d	BAY15d	W2.5x16q	W2.5x16q
W2.5x16q	BAY15d	W2.5x16d	W2.5x16q	W2.5x16q	W2.1x9.5d	W2.1x9.5d
W2.1x9.5d	W2.1x9.5d	W2.5x16q	W2.1x9.5d	W2.1x9.5d	W3x16d	W2.1x9.5d
		W2.1x9.5d	W3x16d	W2.1x9.5d		W3x16d
		W2.1x9.5d		W3x16d		
		W3x16d		W3x16q		
		W3x16q				
Canbus Control Unit 21W <sup>2)</sup>			Canbus Control Unit 5W and 21W <sup>2)</sup>			

LED Color	Use behind red glass	Use behind clear glass	Use behind amber glass
<b>Red</b> (Tail light, Brake light)	Yes	Not recommended	Not recommended
<b>White</b> (Daytime running light, Reversing light, License plate light, Parking light)	Not recommended	Yes	Not recommended
<b>Amber</b> (Indicator light, Side marker light)	Not recommended	Yes	Yes

LEDiving® replacement lamps – Overview of exterior rear applications




LEDiving® SL – Exterior rear lighting <sup>1)</sup>										
1	2	3	4	5	6	7				
Rear indicator	License plate light	Brake light, Third braking light	Rear fog light	Tail light	Reversing light	Additional brake light				
≅ P21W, PY21W, P27/7W, W21W,	≅ C5W, P21W, P21/5W, W5W	≅ P21W, P21/5W, P27W, P27/7W, W5W, W21W, W21/5W	≅ P21W, P21/5W, P27/7W, W16W, W21W	≅ P21W, P21/5W, P27/7W, W5W, W21W, W21/5W	≅ P21W, P27/7W, W16W, W21W	≅ P21W, P27/7W, W5W, W21W				
BA15s	SV8.5-8 (31, 36, 41mm)	BA15s	BA15s	BA15s	BA15s	BA15s	BA15s	BA15s	BA15s	BA15s
BAU15s	BA15s	BAY15d	BAY15d	BAY15d	BAY15d	W2.5x16q	W2.5x16q	W2.5x16q	W2.5x16q	W2.5x16q
W2.5x16q	BAY15d	W2.5x16q	W2.5x16q	W2.5x16q	W2.5x16q	W2.1x9.5d	W2.1x9.5d	W2.1x9.5d	W2.1x9.5d	W2.1x9.5d
W3x16d	W2.1x9.5d	W2.1x9.5d	W2.1x9.5d	W2.1x9.5d	W2.1x9.5d	W3x16d	W3x16d	W3x16d	W3x16d	W3x16d
		W3x16d	W3x16d	W3x16d	W3x16d					
		W3x16q			W3x16q					
Canbus Control Unit 21W <sup>2)</sup>				Canbus Control Unit 5W and 21W <sup>2)</sup>						

Available color options:

LEDiving® PREMIUM SL	LEDiving® SL
Cool White	Cool White
Red	Red
Amber	Amber


1) These products do not have ECE approval. This means they must not be used on public roads in any exterior application. Use on public roads leads to cancellation of operating license and loss of insurance coverage. Several countries do not allow sale and use of these products. Please contact your local distributor for information on the availability in your country.  
 2) LEDiving® CANBUS CONTROL UNITS avoid error messages on the board computer when using LED retrofits within 5W, 21W and 50 W applications.

LEDiving® replacement lamps – Overview of interior applications

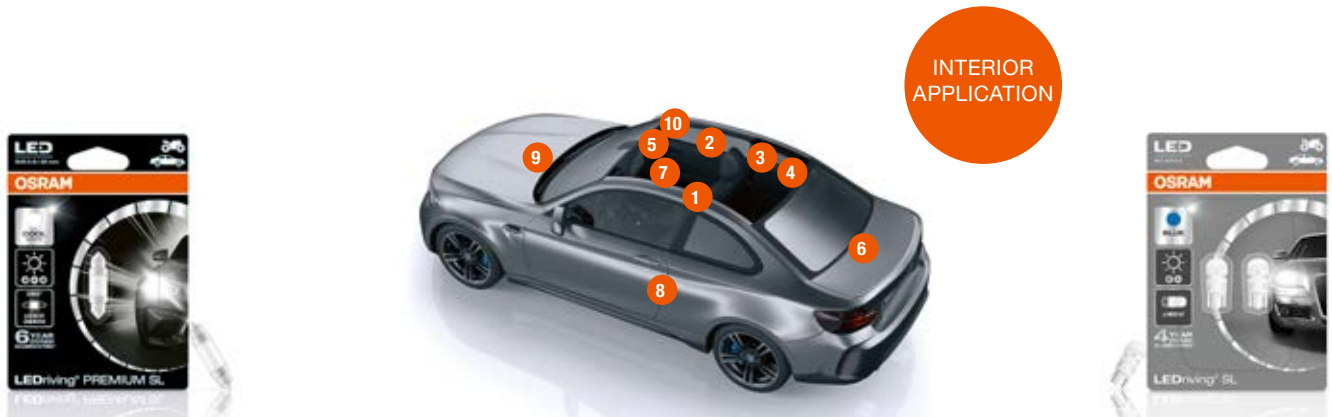

LEDiving® PREMIUM SL – Interior lighting <sup>1)</sup>									
1	2	3	4	5	6	7	8	9	10
Dome light front	Reading light front	Dome light behind	Reading light behind	Glovebox light	Trunk light	Legroom light	Door/ Side light	Engine compartment light	Make-up mirror/visor light
≅ C5W, W5W, T4W				≅ C5W, W5W, WY5W, T4W		≅ C5W, W5W, WY5W		≅ C5W, W5W	
W2.1x9.5d	W2.1x9.5d	W2.1x9.5d	W2.1x9.5d	W2.1x9.5d	W2.1x9.5d	W2.1x9.5d	W2.1x9.5d	W2.1x9.5d	W2.1x9.5d
SV8.5-8 (31, 36, 41mm)	SV8.5-8 (31, 36, 41mm)	SV8.5-8 (31, 36, 41mm)	SV8.5-8 (31, 36, 41mm)	SV8.5-8 (31, 36, 41mm)	SV8.5-8 (31, 36, 41mm)	SV8.5-8 (31, 36, 41mm)	SV8.5-8 (31, 36, 41mm)	SV8.5-8 (31, 36, 41mm)	SV8.5-8 (31, 36, 41mm)
BA9s	BA9s	BA9s	BA9s	BA9s	BA9s	BA9s	BA9s	BA9s	BA9s

LEDiving® SL – Interior lighting <sup>1)</sup>									
≅ C5W, W5W, T4W				≅ C5W, W5W, WY5W, T4W		≅ C5W, W5W, WY5W		≅ C5W, W5W	
W2.1x9.5d	W2.1x9.5d	W2.1x9.5d	W2.1x9.5d	W2.1x9.5d	W2.1x9.5d	W2.1x9.5d	W2.1x9.5d	W2.1x9.5d	W2.1x9.5d
SV8.5-8 (31, 36, 41mm)	SV8.5-8 (31, 36, 41mm)	SV8.5-8 (31, 36, 41mm)	SV8.5-8 (31, 36, 41mm)	SV8.5-8 (31, 36, 41mm)	SV8.5-8 (31, 36, 41mm)	SV8.5-8 (31, 36, 41mm)	SV8.5-8 (31, 36, 41mm)	SV8.5-8 (31, 36, 41mm)	SV8.5-8 (31, 36, 41mm)



Available color options:

LEDiving® PREMIUM SL		LEDiving® SL		
Cool White	Blue	Cool White	Green	Red
Warm White	Amber	Blue	Amber	

1) These products do not have ECE approval. This means they must not be used on public roads in any exterior application. Use on public roads leads to cancellation of operating license and loss of insurance coverage. Several countries do not allow sale and use of these products. Please contact your local distributor for information on the availability in your country.