


### Dimmer Compatibility Overview: PrevaLED FLAT AC G2 PC

Property of the OSRAM GmbH. Every kind of circulation of this page or its content to third party needs to be approved by Osram. Prohibited is also transcription, duplication, unauthorized excerpt and suchlike. All information and conclusions contained in this report are subject to change based on new information. In this case we will update the existing report and provide a new version which will contain details of this new information. Only the most recent revision of this report represents the full and up to date understanding of the matter at hand. Specifically if this report reveals deficiencies it is not possible to conclude any measures, changes or conclusions without agreement of OSRAM. Therefore it is not possible to use these as a basis for any requests towards OSRAM or others.

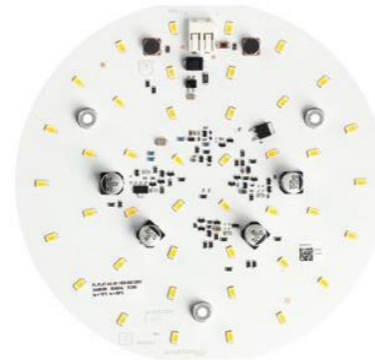

Dimmability traffic light system:

1	very good dimmability habits
0,5	moderate dimmability habits
0	partical ceritical dimmability habits (flickering or accoustic noises may occur)

Brand	Model	Power range	Frequency	Voltage range	Leading or Trailing	PL-FLAT-AC-PC-G2 1500-830 230 V 4052899969629			PL-FLAT-AC-PC-G2 2500-830 230 V 4052899969636		
						1 module	2 module	5 module	1 module	2 module	5 module
Berker	2873	20-500W	50Hz	230V	L	1	1	1	1	1	1
Busch Jäger	2247 U	20-500W	50Hz	230V	L	1	1	1	1	1	1
Busch Jäger	6591 U-101	60-420W	50Hz	230V	U	0,5	0,5	0,5	0,5	0,5	0,5
Berker	286110	50-420W	50Hz	230V	U	1	1	1	1	1	1
ELSO	174250	40-450W	50Hz	230V	U	1	1	1	1	1	1
Busch-Jäger	6517 U-101	60-400W	50Hz	230V	L				0,5		
Conrad	624000-BP Touch	40-250W	50Hz	230V	L	0,5	0,5	0,5	0,5	0,5	0,5
ELSO	174120	20-500W	50Hz	230V	L	0	0	1	0	0	1
HAGER	WUD43	40-500W	50Hz	230V	U	1	1	1	1	1	1
Jung	254 NIE1	50-420W	50Hz	230V	U	1	1	1	1	1	1
Merten	MEG5139-0000	20-600W	50Hz	230V	U	1	1	1	1	1	1
GAO	4242	20-300W	50Hz	230V	L	1	1	1	1	1	1
HAGER	WUD40	40-600W	50Hz	230V	L	0	0,5	0,5	0,5	0,5	0,5
HAGER	WUD41	40-500W	50Hz	230V	L	0	0,5	0,5	0,5	0,5	0,5
Kopp	806800004	40-400W	50Hz	230V	L	1	1	1	1	1	1
Elso Schneider	ELG174161	9-100W	50Hz	230V	L	1	1	1	1	1	1
Elso Schneider	ELG174201	20-315W	50Hz	230V	L	1	1	1	1	1	1
Elso Schneider	ELG174211	20-630W	50Hz	230V	L	1	1	1	1	1	1
Merten	572599	20-500W	50Hz	230V	L	1	1	1	1	1	1
Merten	573299	25-600W	50Hz	230V	L	0	0	0,5	0	0	0,5
Merten	MEG5131-0000	40-400W	50Hz	230V	L	1	1	1	1	1	1
Merten	MEG5133-0000	40-600W	50Hz	230V	L	1	1	1	1	1	1
Merten	MEG5140-0000	20-100W	50Hz	230V	L	1	1	1	1	1	1
Elso Schneider	ELG174251	20-420W	50Hz	230V	U	1	1	1	1	1	1
GAO	4248	40-300W	50Hz	230V	T	0,5	0,5	0,5	0,5	0,5	0,5
PEHA	435 HAN Niedervolt	60-600W	50Hz	230V	L	1	1	1	1	1	1

PEHA	80.433 V	60-300W	50Hz	230V	L	0	0	0	0	0	1
Siemens	5TC8256	50-400W	50Hz	230V	L	0	0	1	0	0	1
Siemens	5TC8283	50-600W	50Hz	230V	L	1	1	1	1	1	1
Gira	30700	20-525W	50Hz	230V	T	1	1	1	1	1	1
Gira	117600	50-420W	50Hz	230V	L	1	1	1	1	1	1
Conrad	102010	20-500W	50Hz	230V	L	1	1	1	1	1	1
sygonix	33594c	7-110W	50Hz	230V	L	1	1	1	1	1	1
sygonix	33595q	20-500W	50Hz	230V	L	1	1	1	1	1	1
sygonix	33595v	60-400W	50Hz	230V	L	0	0	1	0	1	1
Kopp	dimmat	40-400W	50Hz	230V	L	0,5	0,5	0,5	0,5	0,5	0,5
Legrand	775654	40-400W	50Hz	230V	L	0	0	1	1	1	1
Gira	226200	20-500W	50Hz	230V	L	1	1	1	1	1	1
Busch-Jäger	6524 U	2-100W	50Hz	230V	LED	not working	not working	not working	not working	not working	not working
Busch-Jäger	6523 U	2-25W	50Hz	230V	LED	1	1	1	1	1	1
opus	852.090	60-400W	50Hz	230V	L	0	0	1	0	0	1
opus	852.390	60-400W	50Hz	230V	L	0	0	1	0	0	1
Berker	286710	20-360W	50Hz	230V	T	1	1	1	1	1	1
Berker	2874	50-525W	50Hz	230V	T	1	1	1	1	1	1
Busch-Jäger	6513 U-102	40-420W	50Hz	230V	T	1	1	1	1	1	1
Busch-Jäger	6519 U	40-550W	50Hz	230V	T	1	1	1	1	1	1
düwi		50-300W	50Hz	230V	L	1	1	1	1	1	1
Hager	WUD86	40-500W	50Hz	230V	L	1	1	1	1	1	1
Merten	MEG5170-0300	10-200W	50Hz	230V	LED	1	1	1	1	1	1
ELSO	174200	40-315W	50Hz	230V	T	1	1	1	1	1	1
ELSO	174210	60-630W	50Hz	230V	T	1	1	1	1	1	1
Jung	211 GDE	100-1000W	50Hz	230V	T	0	1	1	1	1	1
Jung	225 TDE	20-525W	50Hz	230V	T	1	1	1	1	1	1
Kopp	807200007	20-275W	50Hz	230V	T	1	1	1	1	1	1
Merten	577199	20-315W	50Hz	230V	T	1	1	1	1	1	1
Merten	MEG5137-0000	20-630W	50Hz	230V	T	1	1	1	1	1	1
PEHA	433 HAB	20-315W	50Hz	230V	T	1	1	1	1	1	1
PEHA	435 HAB	20-525W	50Hz	230V	T	1	1	1	1	1	1
Siemens	5TC8284	20-600W	50Hz	230V	T	1	1	1	1	1	1
sygonix	33595a	20-315W	50Hz	230V	T	1	1	1	1	1	1
sygonix	33596v	15-150W	50Hz	230V	T	1	1	1	1	1	1
sygonix	33594R	20-250W	50Hz	230V	L	1	1	1	1	1	1
Jung	225NVDE	20-500W	50Hz	230V	L	1	1	1	1	1	1
Berker	2902	50-400W	50Hz	230V	U	1	1	1	1	1	1
Berker	2861 10	50-420W	50Hz	230V	U	1	1	1	1	1	1
Berker	8542 12	25-400W	50Hz	230V	U	1	1	1	1	1	1
ELSO	174260	20-400W	50Hz	230V	U	1	1	1	1	1	1